

MAIN LINE BRANCH TERMINALS (HLAK)

HLAK 35/25 TYPE A - 1 POLE

MAIN LINE (PER POLE)	BRANCH LINE (PER POLE)
35 mm ² - 4 mm ²	25 mm ² - 2,5 mm ²
25 mm ² - 2,5 mm ²	16 mm ² - 1,5 mm ²

- > modular system, module width 178 mm
- > user-defined stackable
- > to fit on DIN rail TS 35



081210-1-4 1/4



081210-0-4 1/2



081220-0-4



2/2 081220-1-4



081240-0-4



4/2 081240-1-4



3/2 1/6 081240-2-4



081240-3-4



3/2 1/4 081240-4-4



4/4





081250-0-4



5/2 081250-1-4



5/4

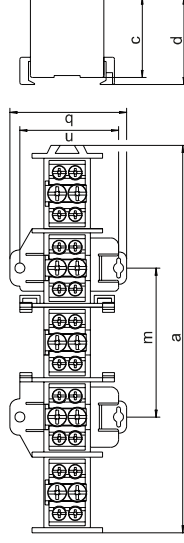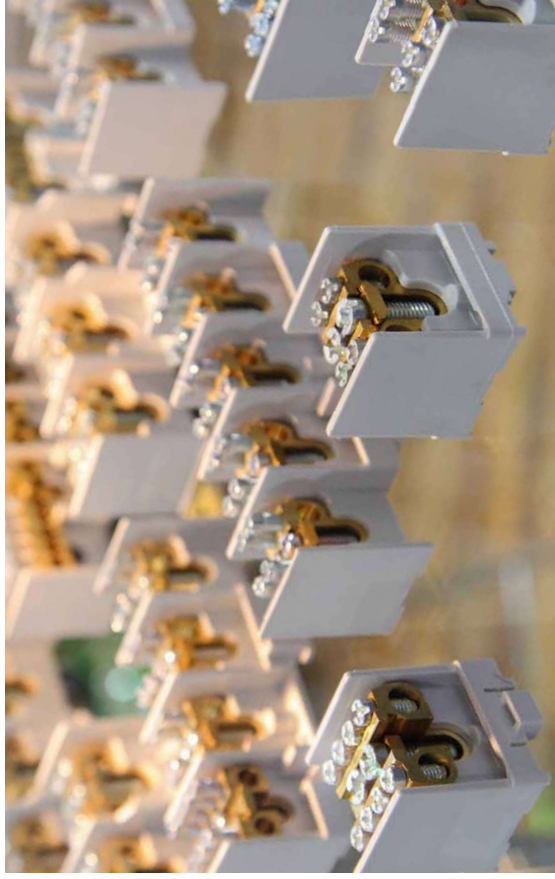

For copper conductors (Cu)



NOMINAL VOLTAGE	NOMINAL CURRENT		STANDARDS											
	500 V	100 A	as per DIN VDE 0603-2											
Part No.	Pole No.	Inserts/Outgoings*	a	b	c	d	m	n	PU	GTIN / EAN				
081210-0-4	1	1 / 2	40	44	40	44			20	4051589812108				
081210-1-4	1	1 / 4	40	44	40	44			20	4051589812115				
081220-0-4	2	2 / 2	77	44	40	44			10	4051589812207				
081220-1-4	2	2 / 4	77	44	40	44			10	4051589812214				
081240-0-4	4	4 / 2	154,5	60	40	46	74	48	1	4051589812405				
081240-1-4	4	3 / 2 1 / 6	192	60	40	46	74	48	1	4051589812412				
081240-2-4	4	3 / 4 1 / 6	192	60	40	46	74	48	1	4051589812429				
081240-3-4	4	3 / 2 1 / 4	154,5	60	40	46	74	48	1	4051589812436				
081240-4-4	4	4 / 4	154,5	60	40	46	74	48	1	4051589812443				
081250-0-4	5	5 / 2	192	60	40	46	74	48	1	4051589812504				
081250-1-4	5	5 / 4	192	60	40	46	74	48	1	4051589812511				

*Example: 3/4 1/6 = 3 Inserts / 4 Outgoings | 1 Insert / 12 Outgoings