

DISTRIBUTION BOXES

GENERAL FEATURES:

Type of terminations :
Moulded cable.

Circuit type :
PNP circuit,
NPN circuit (upon request).

Local diagnostic :
Supply voltage: Green Led,
Status display I/O: Red Led.

SIGNAL per OUTLET:
Double,
Single (upon request).

Rated voltage:
10-30V DC.

Rated current:
Current carrying capacity per I/O signal: 2A,
Current carrying capacity per slot: 4A,
Total rated current: 10A.

Fixing system :
M12 coupling nut.

Max. screw torque IEC60947-1 :
M12 coupling nut torque 0,4N*m.

M12 Contact material and treatment :
Brass + Gold flash.

Housing material :
PA66 UL94-V2.


Internal core material :
PA66 UL94-V2.

Coupling nut material :
Brass + Nickel plated.

Flammability resistance :
UL94-V2 - Standard.

Protection class :
IP 67 (assembled).

Operating temperature :
-40°C +90°C.

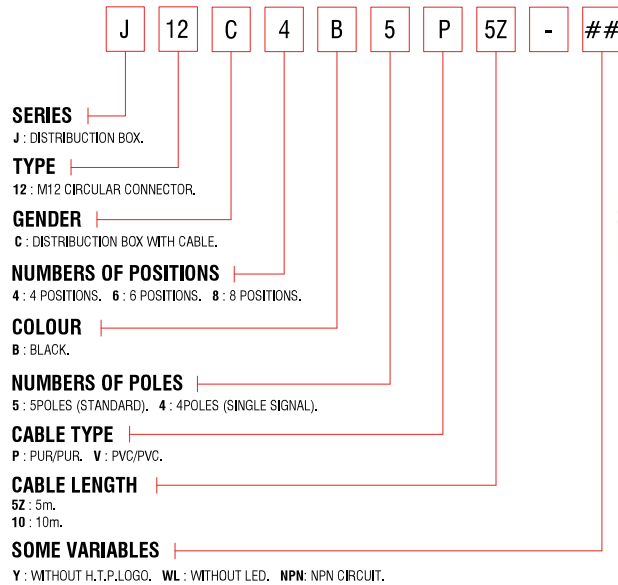


J12C4B...



J12C6B...



J12C8B...



4 POSITIONS L = 102mm.
6 POSITIONS L = 130mm.
8 POSITIONS L = 150mm.

